


32 inches Industrial Panel PC

Demand 890320F6



Industrial Mother Board

(MS-98F6) Spec.

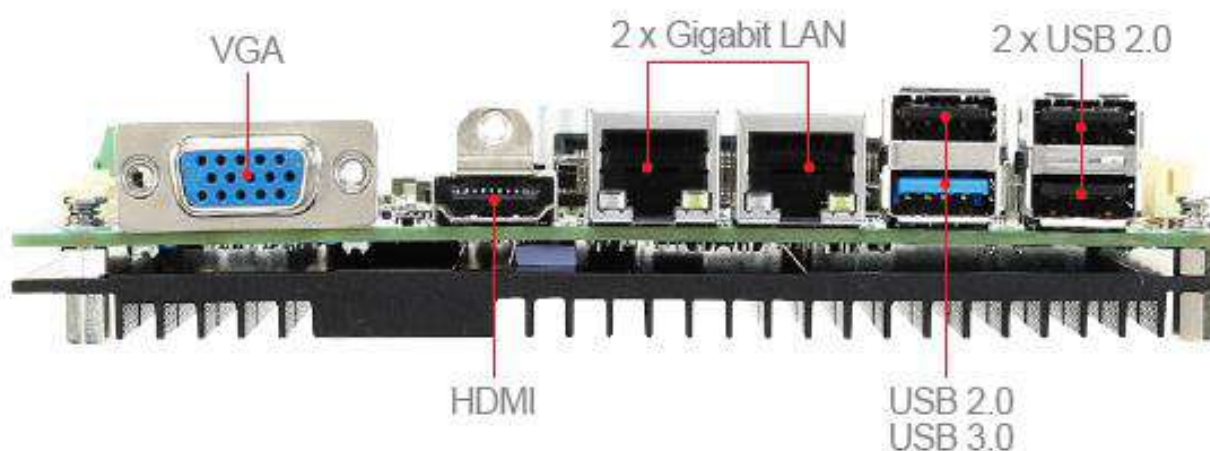

Specification

| | | |
|-----------------------|-----------------------|----------------------------|
| Panel Specification | Size/ Type | 32 " TFT industrial panel |
| | Resolution | 1920 x 1080 |
| | Brightness | 400 cd/m ² |
| | Contrast Ratio | 1100 : 1 (typ.) |
| | Viewing Angle | - 89~89 (H) ; - 89 ~89 (V) |
| | Max. Colors | 16.7 M |
| | Touch | Optional |
| Environment Tolerance | Operating Temperature | 0 ~ 50°C |
| | Operating Humidity | 10 ~ 90%,n on-condensing |

32 inches Industrial Panel PC

Demand 890320F6



Specification

| | | |
|---------------|---------------------|-----------------------------------------------------------------------------------|
| System | CPU | Intel® Celeron® Processor J1900/N2930, Quad Core |
| | Memory | Single-channel for DDR3L 1333 MHz Up to 8 GB |
| | Storage | 1xSATA2.0;1xmSATA |
| | LAN | 2 x Intel®I210-AT GbE LAN |
| | Audio | Realtek ®ALC887-VD2-CG HD Audio Codec |
| Input/Output | Serial Ports | 4 x COM(internal) COM1: RS-232/422/485, 0V/5V/12V COM2~4: RS-232, 0V/5V/12V |
| | USB Ports | 7xUSB2.0(3xrear,4 x internal), 1xUSB3.0(1 x rear) |
| | PS/2 | 1 (wafer connector) |
| | Paeallel | N/A |
| | GPIO | 8-bits (4x GPI; 4x GPO), 5V |
| | Power Specification | Power Input |
| Power Cord | | N/A |
| Order Options | OS | Windows 7(64-bit)/8.1 (32/64-bit) /10(64-bit) |
| | Storage | By customer request |
| | Memory | Up to 8GB |
| | IP65 | By customer request |
| | Touch | P-CAP, IR |