

**12.1 inches
Open frame
Demand 30121X**



Feature

- 1.High Contrast color TFT LCD Monitor support resolution up to XGA(1024x768)**
- 2.PowermanagementsystemconformstoVESADPMSandEPAEnergyStarstandards.**
- 3.Fullconsiderationfortouchscreeninstallationandapplication.**
- 4.Universal Poweradapter.**
- 5.SupportDDC1&DDC2BforPlug&Playcompatibility.**
- 6.AdvancedOSDcontrolforpicturequalityadjustment.**
- 7.Detachablestandforwall-mountingapplication.**
- 8.Heavy duty Monitor with steel frame.**

Specification

Display	Viewing Size Image	12.1"
	Active Display Area (mm)	245.76 (H) x 184.32 (V)
	Pixel Pitch (mm)	0.240(H)x0.240(V)
	Resolution	1024 x 768
	Contrast Ratio	700 : 1(typ.)
	Color	262K,16.2M
	Brightness	500 cd/m ²
	Viewing Angle	-80~80 (H) ; -70~70 (V)
	Recommended Resolution	1024 x 768 @ 60Hz, 75Hz
	Signal Connector	VGA, DVI

12.1 inches
Open frame
 Demand 30121X








Specification

Power	Source	12V DC in,with External AC-DC Adapter(100-240V)
	Consumption	8W typical,normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V, DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

12.1 inches Open frame Demand 30121X



Mechanical Drawing

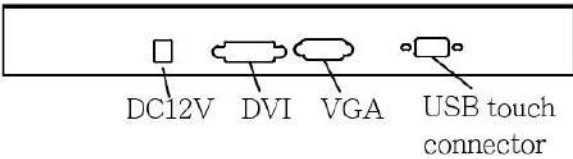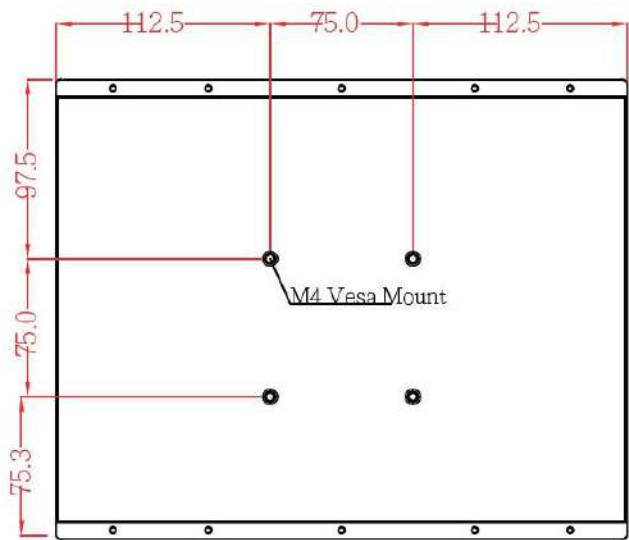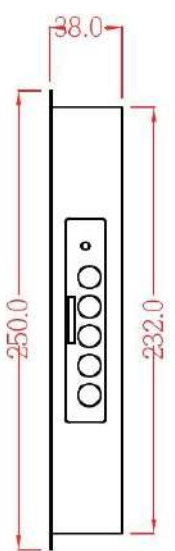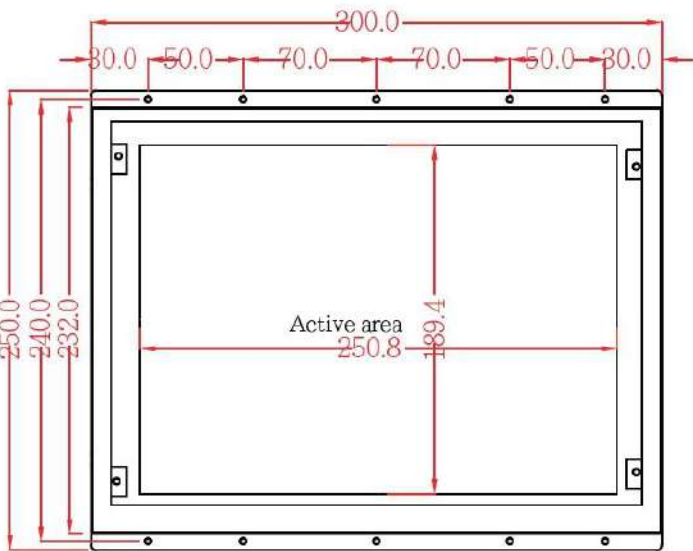

UNIT:mm