

10.4 inches Chassis LCD Monitor Demand 40104X



Feature

1. High Contrast color TFT LCD Monitor support resolution up to XGA (1024 x 768)
2. Power management system conforms to VESA DPMS and EPA Energy Star standards.
3. Full consideration for touch screen installation and application.
4. Universal Power adapter.
5. Support DDC1 & DDC2B for Plug & Play compatibility.
6. Advanced OSD control for picture quality adjustment.
7. Detachable stand for wall-mounting application.
8. Heavy duty Monitor with steel frame.
9. Custom design by request.

Specification

Display	Viewing Size Image	10.4"
	Active Display Area (mm)	210.4 (H) x 161.8 (V)
	Pixel Pitch (mm)	0.264 x 0.264
	Resolution	1024 x 768
	Contrast Ratio	1200 : 1 (typ.)
	Color	16.2M
	Brightness	500 cd/m ²
	Viewing Angle	-88~88(H) ; -88~88(V)
	Recommended Resolution	1024 x 768 @ 60Hz, 75Hz
	Signal Connector	VGA, DVI

10.4 inches Chassis LCD Monitor Demand 40104X







Specification

Power	Source	12V DC in, with External AC to DC Adapter(100~240V AC)
	Consumption	10W typical,normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V, DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

10.4 inches Chassis LCD Monitor Demand 40104X



Mechanical Drawing

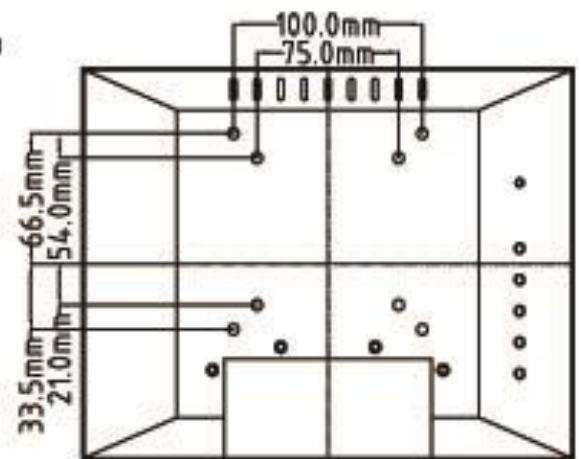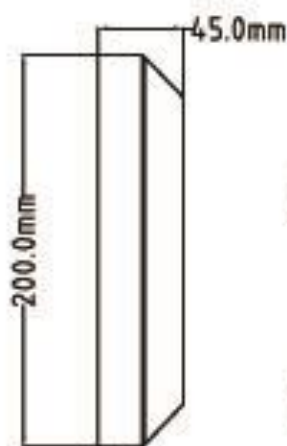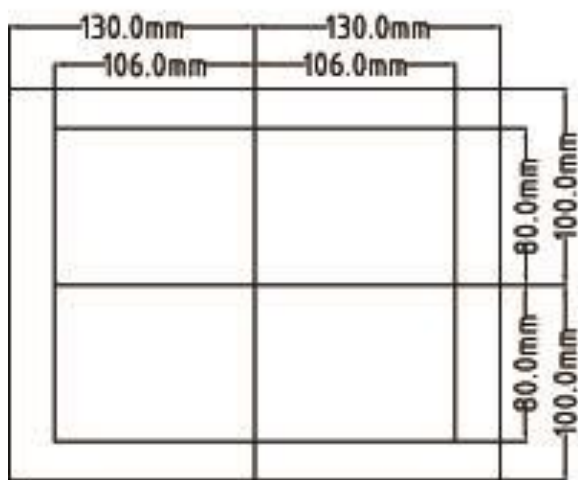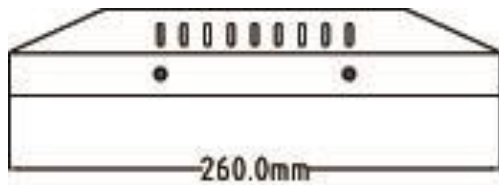

UNIT:mm