

23.1 inches Chassis LCD Monitor

Demand 40231



Feature

1. High Contrast color TFT LCD Monitor support resolution up to UXGA (1600 x 1200)
2. Power management system conforms to VESA DPMS and EPA Energy Star standards.
3. Full consideration for touch screen installation and application.
4. Universal Power adapter.
5. Support DDC1 & DDC2B for Plug & Play compatibility.
6. Advanced OSD control for picture quality adjustment.
7. Detachable stand for wall-mounting application.
8. Heavy duty Monitor with steel frame.
9. Custom design by request.

Specification

Display	Viewing Size Image	23.1"
	Active Display Area (mm)	470.4 (H) x 352.8 (V)
	Pixel Pitch (mm)	0.294x 0.294
	Resolution	1600 x 1200
	Contrast Ratio	600 : 1 (typ.)
	Color	16.7M
	Brightness	500 cd/m ²
	Viewing Angle	-85~85 (H) ; -85~85 (V)
	Recommended Resolution	1600x 1200 @ 60Hz
	Signal Connector	VGA, DVI

**23.1 inches
Chassis LCD Monitor
Demand 40231**




Specification

Power	Source	12V DC in, with External AC-DC Adapter(100-240V)
	Consumption	69.6W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

23.1 inches Chassis LCD Monitor Demand 40231



Mechanical Drawing

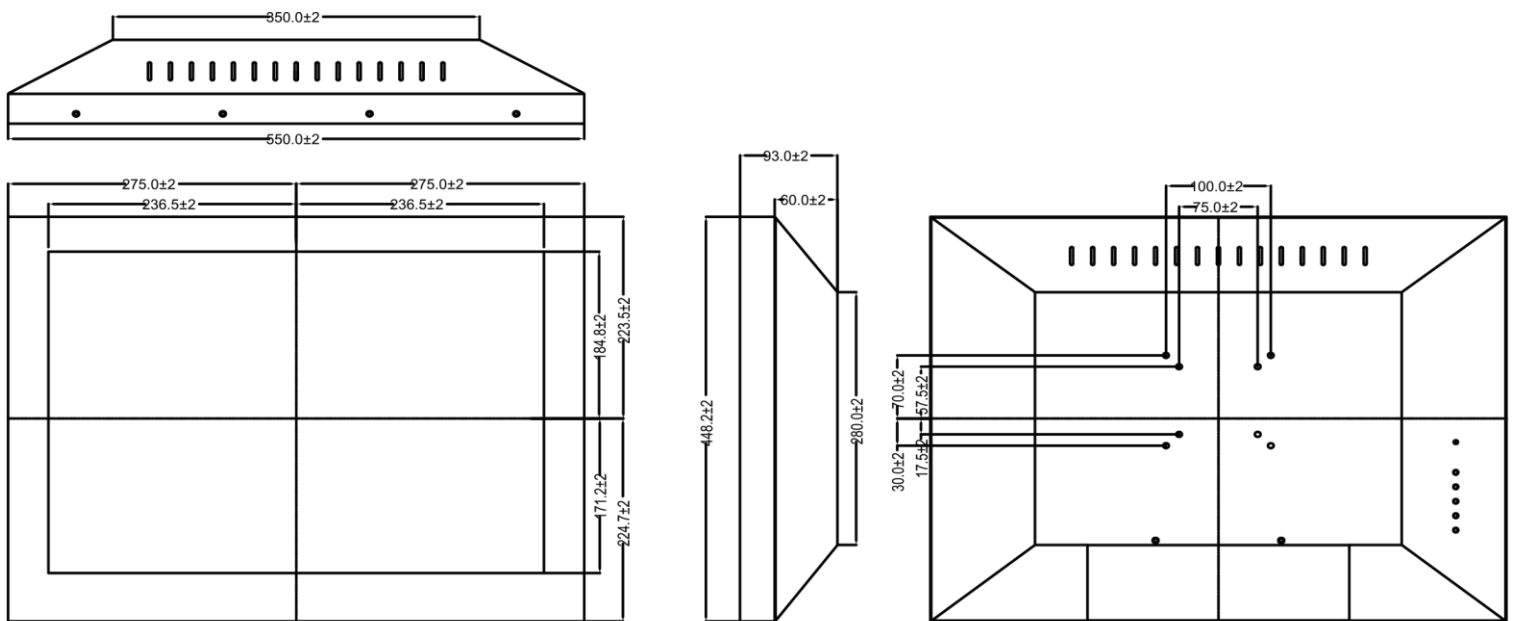

UNIT:mm